

CUROX[®]M-403R-3

Methyl ethyl ketone peroxide
CAS#1338-23-4
Liquid mixture

Description

Red coloured, mobile liquid, consisting of peroxides based on methylethylketone, essentially desensitised with phthalate plasticiser. This ketone peroxide is used as an initiator (radical source) in the curing of unsaturated polyester resins. Due to the red coloured peroxide an optimal homogenization in the mixture is ensured. After the curing reaction the red coloration of the compound is no longer noticeable.

Main application: Hand lay-up, spray-up, continuous laminating, centrifugal casting, filament winding and polyester concrete.

Technical Data

Appearance	Red liquid
Active oxygen	Approx 9.7 % w/w
Free hydrogenperoxide content	Approx. 2.5 % w/w
Water content	Approx. 1.8 % w/w
De-sensitising agent	Dimethylphthalate
Density at 20°C	Approx. 1.12 g/cm ³
Viscosity at 20°C	Approx. 22 mPa.s
Miscibility	Miscible with alcohols, phthalates
Critical temperature (SADT)	Above 60°C
Cold storage stability	Below -20°C
Recommended storage temperature	0 to 30°C
Maintenance of activity at 30°C as from date of delivery	6 months

Application

POLYESTER CURING: Curing agent for all UP resin types at ambient temperature in combination with cobalt accelerators. Standard dosage level: 1-3% as supplied, with 0.5-2% of a 1% cobalt solution.


"Pot life" (gel time of resin + peroxide + accelerator) relatively short compared to standard MEKP's, but may be prolonged by adding Inhibitor TC-510.

CURING PERFORMANCE: Moderate evolution of heat. Relatively short mould release time. Higher reactivity in the MEKP-product range. Temperatures below 20°C prolong curing times considerably, alternatively cobalt / amine accelerators should then be used.


PROCESSING METHODS: Particularly hand lay-up, spray lay-up, centrifugal casting, filament winding, casting of resins, limited for gelcoats.

SPRAY EQUIPMENT: Use spray equipment in accordance with manufacturer's instructions. Ensure all safety devices are operational. Do not clear gun by spraying MEKP into the air.

Activity:

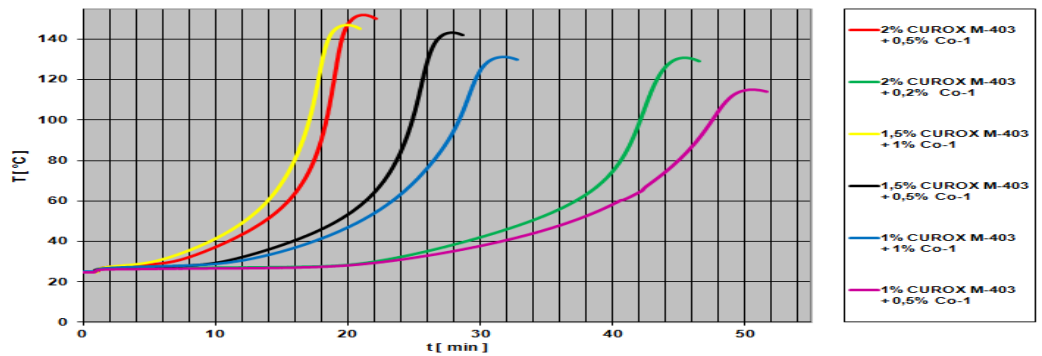

Measurements in compliance with DIN 16945 at 25°C with OPA resin (20g in a test tube)							
Medium reactive resin type (OPA)		100	100	100	100	100	100
CUROX [®] M-403R-3	[Vol-%]	2.0	2.0	1.5	1.5	1.0	1.0
BÜFA [®] Accelerator Co 1	[Vol-%]	0.5	0.2	1.0	0.5	1.0	0.5
Curing data							
Gel time 25 -30°C t _{gel}	[min]	6.5	22.0	5.0	10.5	11.5	22.5
Gel time 25 -35°C t _{gel}	[min]	9.0	26.0	7.5	13.5	15.0	27.5
Curing time t _{max}	[min]	21.0	45.5	20.0	28.0	32.0	50.5
Peaktemperature T _{max}	[°C]	152	130	147	143	130	116

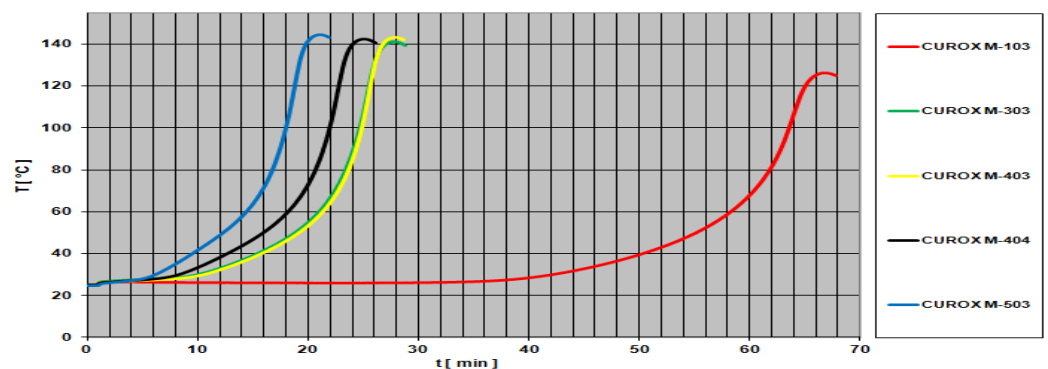

Measurements in compliance with DIN 16945 at 25°C with OPA resin (20g in a test tube)						
Medium reactive resin type (OPA)		100	100	100	100	100
CUROX [®] M-103	[Vol-%]	1.5				
CUROX [®] M-303	[Vol-%]		1.5			
CUROX [®] M-403R-3	[Vol-%]			1.5		
CUROX [®] -404	[Vol-%]				1.5	
CUROX [®] M-503	[Vol-%]					1.5
BÜFA [®] Accelerator Co 1	[Vol-%]	0.5	0.5	0.5	0.5	0.5
Curing data						
Gel time 25 - 30°C t _{gel}	[min]	42.0	10.0	10.5	8.5	6.0
Gel time 25 - 35°C t _{gel}	[min]	47.0	13.0	13.5	11.0	8.0
Curing time t _{max}	[min]	66.5	28.0	28.0	25.0	21.0
Peaktemperature T _{max}	[°C]	127	141	143	143	145

Further information on suitable curing agents for unsaturated polyester resins is given in our application brochures on this subject

Standard Packaging

The standard package size of CUROX[®]M-403R-3 are 5 kg and 25 kg polyethylene bottles.

Disclaimer

This information and all further technical advice are reflecting our present knowledge and experience based on internal tests with local raw materials with the purpose to inform about our products and applications. The information should not be construed as guaranteeing specific properties of products described or their suitability for a particular application, nor as providing complete instructions for use. The information implies no guarantee for product and shelf life properties, nor any liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. We reserve the right to make any changes according to technological progress or further developments.

Application and usage of our products based on our technical advice is out of our control and sole responsibility of the user. The user is not released from the obligation to conduct careful inspection and testing of incoming goods in order to verify the suitability for the intended application.

United Initiators
EU
T: +49 89 74422 237
F: +49 89 74422 6237
cs-initiators.eu@united-in.com

United Initiators
Nafta
T: +1 800 231 2702
F: +1 440 323 0898
cs-initiators.nafta@united-in.com

United Initiators
China
T: +86 20 6131 1370
F: +86 139 2503 8952
cs-initiators.cn@united-in.com

United Initiators
Australia
T: +61 2 9316 0046
F: +61 2 9316 0034
cs-initiators.au@united-in.com

www.united-initiators.com